



Actual 2020

Our story	3
ZEPHYR product line	4-8
KRONOS product line	10-16
THEMYS product line	18-21
LYNX product line	23-29
Accessories	30
Mounts	32-33
List of riflescopes	34
List of reticles	35



OUR STORY

Valiant Optics has been established in the **Czech Republic** over 9 years ago. The main thought of Valiant is to produce a high-quality riflescopes, high quality mounts which are suitable for **sniper rifles** and other shooting accessories in reasonable prices which may compete with other well-known brands. Over the time, we have decided to establish our **own factory** with experienced engineers to manufacture sport optics on a different level of quality. Our main specialization are riflescopes intended for sport and hunting. Themys and Zephyr series can be fitted with all kinds of reticles. We have also involved a unique **HFT reticle** which meets all requirements for competition shooting of the discipline. Customers can choose among **4 series** which are divided by scope structure and purposes.

Thanks to our own inner lens system we achieve better clarity and field of view with all our scopes. Since we want to satisfy our customers completely, we offer acces-

sories like a high quality mounts, handmade scope bag, zoom pointer, kill flash, transparent lens caps, SWAT wheel and others.

We are working every day to improve the quality, test all new possibilities and options of scope structure and also involving our new features. Due to a **hard resistance tests**, scopes can be fitted on all kinds of rifles without limitation of caliber or energy.

Here are the main features of Valiant optics: High resistance of the main tube. Abrasion-resistant, precious looking anodized surface finish, **multiple lens coating** finishes. Reliable function of all mechanical parts. The user may select between scopes with fixed and variable magnification, different main tubes, with or without illumination and with a great number of reticles.

ZEPHYR

ZEPHYR product line

Zephyr is the **premium range** of Valiant riflescopes that meets the highest demands of hunters and shooters. All scopes are characterized by the highest quality of processing, equipment and technology. Scopes can be fitted with all kinds of reticle from our offer and you will find there a high magnification models. **Push-pull locking system** is one of the most popular and we care about this feature a lot while processing. If you need to zero your scope you will certainly appreciate the possibility of **screw zeroing** done by a coin. For a maximum usable value, the screw is made of steel. We have also added a diopter correction from -2 to +2. Since the riflescope is suitable for **high caliber rifles**, we have equipped it with an adjustable side parallax with range from 10yds to infinity. Big wheel of parallax is included with scope and it allows more comfortable manipulation. On the same turret you can control **illumination** which is always appreciated in low light conditions or if your target does not have enough contrast with reticle. Illumination is in red and green color with 5 levels of intensity.



Shockproof



30mm 1-piece
main tube



Waterproof



Side focus



Fog proof



Anti-reflective
coating



Etched glass
reticle



Push-pull locking
resettable turrets



Multi-coated
lens



Diopter
correction



Multi coated green lens



Push-pull zero resettable turrets




Side parallax and illumination

Zephyr 6-24x50 SF SIR




Technical specifications

Magnification	6-24x
Main tube diameter	30 mm
Lens Coating	Multi coated green lens
Reticle	Etched Glass
Field of view @100 Yards	216-54 in
Exit Pupil	8.3-2 mm
Eye Relief	103-92 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side
Parallax Correction	10 yds-infinity
Turret Type	Locking System Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RGB
Mounting Length	145 mm [5.7 in]
Overall Length	340 mm [13.4 in]
Weight	780 grams




FBR

code:
VL2006




Mil-Dot

code:
VL2106



RAQ

code:
VL2206



20x ½ Mil-Dot

code:
VL2306

The highest magnification from Valiant offer is suitable for long range shooting. Special anti-reflective coating ensures no light transmission defects while aiming. Side focus wheel is designed for quick target distance adjustment. Riflescopes are tested in extreme conditions to withstand immersion and heavy recoils.

Parts Included:



Sunshade



Solid flip-up
lens covers



Manual



SWAT parallax
wheel




Lens cloth

Zephyr 5-20x50 SF SIR




Technical specifications

Magnification	5-20 x
Main tube diameter	30 mm
Lens Coating	Multi coated green lens
Reticle	Etched Glass
Field of view @100 Yards	264-66 in
Exit Pupil	10-2.5 mm
Eye Relief	105-95 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side
Parallax Correction	10 yds-infinity
Turret Type	Locking System Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RGB
Mounting Length	145 mm [5.7 in]
Overall Length	340 mm [13.4 in]
Weight	744 grams




FBR

code:
VL2003




Mil-Dot

code:
VL2103



RAQ

code:
VL2203



20x ½ Mil-Dot

code:
VL2303

The most popular magnification from Zephyr series can be fitted with various reticles. One-piece main tube with etched glass reticle ensures great resistance. Zephyr riflescopes can be fitted on any rifle without limitation of any caliber or energy. Push-pull locking turret with metal screw for easy zeroing.

Parts Included:



Sunshade



Solid flip-up
lens covers



Manual



SWAT parallax
wheel




Lens cloth

Zephyr 4-16x50 SF SIR




Technical specifications

Magnification	4-16x
Main tube diameter	30 mm
Lens Coating	Multi coated green lens
Reticle	Etched Glass
Field of view @100 Yards	326-81 in
Exit Pupil	12-3 mm
Eye Relief	105-95 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side
Parallax Correction	10 yds-infinity
Turret Type	Locking System Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RGB
Mounting Length	145 mm [5.7 in]
Overall Length	340 mm [13.4 in]
Weight	732 grams




FBR

code:
VL2002




Mil-Dot

code:
VL2102



RAQ

code:
VL2202



10x ½ Mil-Dot

code:
VL2302

Zephyr series is our flagship. And that inherently represents model 4-16x50. You can select it in various designs of glass etched reticles. Suitable for sports shooter or passionate hunter. Riflescopes are designed and tested in the Czech Republic. The main feature is the construction of one-piece main tube with a diameter of 30mm. This value will guarantee a sufficiently sharp image even in low light conditions.

Parts Included:



Sunshade



Solid flip-up
lens covers



Manual



SWAT parallax
wheel




Lens cloth

Zephyr 10x44 SF SIR




Technical specifications

Magnification	10x
Main tube diameter	30 mm
Lens Coating	Multi coated green lens
Reticle	Etched Glass
Field of view @100 Yards	238 in
Exit Pupil:	4,4 mm
Eye Relief	100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side
Parallax Correction	10 yds-infinity
Turret Type	Locking System Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RGB
Mounting Length	145 mm [5.7 in]
Overall Length	340 mm [13.4 in]
Weight	715 grams




FBR

code:
VL2004




Mil-Dot

code:
VL2104



HFT

code:
VL2204



10x ½ Mil-Dot

code:
VL2504

Fixed magnification ensures even greater resistance against a heavy recoils. These scopes are used on high caliber hunting rifles. You can select from 4 types of reticle. Classic Mil-Dot, FBR for target shooting, RAQ for hunting, versatile ½ Mil-Dot and mainly the unique HFT reticle. This reticle has been invented by a world champion of Hunting Field Target sport discipline.

Parts Included:



Sunshade



Solid flip-up lens covers



Manual



SWAT parallax wheel



Lens cloth



KRONOS

KRONOS HUNTING product line

Kronos series is intended for real **hunters and tactical shooters**. We have hunters among us, so we know, what they need and prefer to be satisfied with their scope. Model 3-12x56 is produced with **low profiled capped turrets** with easy zeroing by metal screw. Illumination can be adjusted in 11 levels of intensity in red color. This model is produced with fixed parallax at 100 yards and adjustable parallax from 15 yards to infinity. If you use a **night vision** you will definitely choose parallax version. Model 4x40 are also suitable for **crossbow shooters**. Parallax of is fixed at 100 yards. All Kronos riflescopes can be fitted on any rifle without limitation of caliber or energy. One-piece main tube from high grade aluminum offer great resistant and durability.



Shockproof



30mm 1-piece
main tube



Waterproof



Anti-reflective
coating



Fog proof



Capped resettable
turrets



Etched glass
reticle



Diopter
correction



Multi-coated
lens



Multi coated green lens



Diopter correction




Low profile capped turrets

Kronos 3-12x56 SF SIR




Technical specifications

Magnification	3-12x
Main tube diameter	30 mm
Lens Coating	Multi-coated green lens
Reticle	Etched Glass
Field of view @100 Yards	440.4-110.4 in
Exit Pupil:	16.6-4.2 mm
Eye Relief	110-100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side
Parallax Correction	15 yds-infinity
Turret Type	Low profile hidden Turrets
Click Value @100 Yards	1/4 MOA per Click
Illumination	RGB
Mounting Length	130 mm [5.1 in]
Overall Length	330 mm
Weight	750 grams




FBR

code:
VL6001



Mil-Dot

code:
VL6201



RAQ

code:
VL6101

Get this scope and you are ready for your hunt! Great clarity and crispy view will support you all the time. Low profile hidden turrets are easy to reset with metal screw and you will hear each click you make. Red illumination will help in low-light condition in dark forest. Adjustable side focus parallax is really important if you want to use a night vision with it.

Parts Included:



Sunshade



Solid flip-up
lens covers



Manual



SWAT parallax
wheel




Lens cloth

Kronos 3-12x56 SIR




Technical specifications

Magnification	3-12x
Main tube diameter	30 mm
Lens Coating	Multi-coated green lens
Reticle	Etched Glass
Field of view @100 Yards	440.4-110.4 in
Exit Pupil:	16.6-4.2 mm
Eye Relief	110-100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Fixed
Parallax Correction	100 yds
Turret Type	Low profile hidden Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RGB
Mounting Length	130 mm [5.1 in]
Overall Length	330 mm
Weight	680 grams




FBR

code:
VL6002



Mil-Dot

code:
VL6203



RAQ

code:
VL6102

Get this scope and you are ready for your hunt! Great clarity and crispy view will support you all the time. Low profile hidden turrets are easy to reset with metal screw and you will hear each click you make. Red illumination will help in low-light condition in dark forest. Fixed parallax is set to 100 yards.

Parts Included:



Sunshade



Solid flip-up lens covers



Manual




Lens cloth

Kronos 4x40 SIR




COMING SOON



FBR

code:
VL6003



CSB

code:
VL6103

Get this scope and you are ready for your hunt! Great clarity and crispy view will support you all the time. Low profile hidden turrets are easy to reset with metal screw and you will hear each click you make. Red and green illumination will help in low-light condition in dark forest. Fixed parallax is set to 100 yards. Suitable for crossbow shooters.

Parts Included:



Sunshade



Solid flip-up
lens covers



Manual



Lens cloth

Technical specifications

Magnification	4x
Main tube diameter	30 mm
Lens Coating	Multi-coated green lens
Reticle	Etched Glass
Field of view @100 Yards	377.3 in
Exit Pupil:	10 mm
Eye Relief	96.5 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Fixed
Parallax Correction	100 yds
Turret Type	Low profile hidden Turrets
Click Value @100 Yards	1/2 MOA per Click
Illumination	RGB
Mounting Length	109 mm [4.3 in]
Overall Length	248.5 mm
Weight	350 grams

KRONOS

KRONOS TACTICAL product line

Kronos series is intended for real **hunters** and **tactical shooters**. Tactical models can be use for hunting or tactical shooting with different kind of rifles. **Model 3-12x42** is the most **compact** riflescope from our offer. It has adjustable parallax from 10 yards to infinity. If you use a night vision you will definitely welcome this feature. **Model 1-5x24** is a perfect choice for hunting at shorter distance or tactical shooting. Parallax is fixed at 100 yards. All Kronos riflescopes can be fitted on any rifle without limitation of caliber or energy. One-piece main tube from high grade aluminum offer **great resistant** and durability.



Shockproof



30mm 1-piece
main tube



Waterproof



Anti-reflective
coating



Fog proof



Capped resettable
turrets



Etched glass
reticle



Diopter
correction



Multi-coated
lens



Multi coated green lens



Diopter correction



Low profile capped turrets


Kronos 3-12x32 Compact SF



COMING SOON


Technical specifications

Magnification	3-12x
Main tube diameter	30 mm
Lens Coating	Multi-coated green lens
Reticle	Etched Glass
Field of view @100 Yards	430.5-104.8 in
Exit Pupil:	10.58-2.61 mm
Eye Relief	85-89 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side
Parallax Correction	10 yds to infinity
Turret Type	Low profile capped Turrets
Click Value @100 Yards	1/4 MOA per Click
Illumination	No
Mounting Length	117 mm [4.6 in]
Overall Length	251 mm [9.88 in]
Weight	430 grams




VLT

code:
VL6104



Mil-Dot

code:
VL6004



VLT1

code:
VL6204

The most compact model from our offer. Low profile capped turrets with adjustable side focus which works great with night vision. Wide band and multi coated lenses ensure great clarity and reduces image defects. You can choose among 2 types of reticle which are glass etched for a great resistance.

Parts Included:



Sunshade



Solid flip-up
lens covers



Manual



SWAT parallax
wheel



Lens cloth


Kronos 1-5x24 SIR



COMING SOON


Technical specifications

Magnification	1-5x
Main tube diameter	30 mm
Lens Coating	Multi-coated green lens
Reticle	Etched Glass
Field of view @100 Yards	1360.8-274 in
Exit Pupil:	4.7-8 mm
Eye Relief	85-89 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Fixed
Parallax Correction	100 yds
Turret Type	Low profile hidden Turrets
Click Value @100 Yards	1/2 MOA per Click
Illumination	RGB
Mounting Length	162 mm [6.37 in]
Overall Length	246.2 mm [9.7 in]
Weight	300 grams



Duplex

code:
VL6005



TAC

code:
VL6105

One of the most compact models from our offer. Magnification 1-5x is a perfect choice for hunting at shorter distance or tactical shooting. Parallax is fixed at 100 yards. All Kronos riflescopes can be fitted on any rifle without limitation of caliber or energy. One-piece main tube from high grade aluminum offer great resistant and durability.

Parts Included:



Solid flip-up
lens covers



Lens cloth



Manual



THEMYS

THEMYS product line

Themys series offer each model with 4 types of etched glass reticle. FBR for target shooting, RAQ for hunting, versatile ½ Mil-Dot and mainly the unique **HFT reticle**. This reticle has been invented by a world champion of **Hunting Field Target** sport discipline. Low profile opened turrets with extremely well made click system. Front objective parallax and diopter correction are always welcomed. Themys use the same technology and tube structure as Zephyr, so clear vision with great field of view is guaranteed. All lenses are coated with a special **anti-reflective green coating** to reduce reflections. All models are shock-proof, waterproof and fog-proof. All models come with solid flip-up lens covers and sunshade.



Shockproof



Anti-reflective coating



Waterproof



Low profile turrets



Fog proof



Diopter correction



Etched glass reticle



Multi-coated lens



Multi coated green lens



Diopter correction




Low profile turret

Themys 4-12x40 AO




Technical specifications

Magnification	4-12x
Main tube diameter	25.4 mm
Lens Coating	Multi coated green lens
Reticle	Etched Glass
Field of view @100 Yards	295-98 in
Exit Pupil	12-3.8 mm
Eye Relief	110-100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Objective Adjustment
Parallax Correction	10 yds-infinity
Turret Type	Low Profile Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	No
Mounting Length	150 mm [5.7 in]
Overall Length	360 mm [14.2 in]
Weight	532 grams




FBR

code:
VL4002




RAQ

code:
VL4202



HFT

code:
VL4402



**10x ½
Mil-Dot**

code:
VL4102

The one-inch main tube and compact dimensions are great for use on sport air guns or smaller tactical rifles. The main feature of this model are open turrets which are suitable for hunters and shooters who require fast correction. Adjustable parallax from 10 yards to infinity is located on front objective. All lenses are coated with a special anti-reflective coating to reduce reflections.

Parts Included:



Sunshade



Solid flip-up
lens covers




Manual

Themys 4-12x32 AO




Technical specifications

Magnification	4-12x
Main tube diameter	25.4 mm
Lens Coating	Multi coated green lens
Reticle	Etched Glass
Field of view @100 Yards	295-98 in
Exit Pupil	8-2.67 mm
Eye Relief	110-100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Objective Adjustment
Parallax Correction	10 yds-infinity
Turret Type	Low Profile Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	No
Mounting Length	150 mm [5.9 in]
Overall Length	360 mm [13.4 in]
Weight	460 grams




FBR

code:
VL4003




RAQ

code:
VL4203



HFT

code:
VL4303



**10x ½
Mil-Dot**

code:
VL4103

The one-inch main tube and compact dimensions are great for use on sport air guns or smaller tactical rifles. The main feature of this model are open turrets which are suitable for hunters and shooters who require fast correction. Adjustable parallax from 10 yards to infinity is located on front objective. All lenses are coated with a special anti-reflective coating to reduce reflections.

Parts Included:



Sunshade



Solid flip-up
lens covers




Manual

Themys 3-9x40 AO




Technical specifications

Magnification	3-9x
Main tube diameter	25.4 mm
Lens Coating	Multi coated green lens
Reticle	Etched Glass
Field of view @100 Yards	402-125 in
Exit Pupil	12.5-4.4 mm
Eye Relief	104-96 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Objective Adjustment
Parallax Correction	10 yds-infinity
Turret Type	Low Profile Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	11 scales of RED
Mounting Length	125 mm [4.92 in]
Overall Length	320 mm [12.6 in]
Weight	525 grams




FBR

code:
VL4001




RAQ

code:
VL4201



HFT

code:
VL4401



½ Mil-Dot

code:
VL4301

The one inch main tube and compact dimensions are great for use on sport air guns or smaller tactical rifles. The main feature of this model are open turrets which are suitable for hunters and shooters who require fast correction. Adjustable parallax from 10 yards to infinity is located on front objective. All lenses are coated with a special anti-reflective coating to reduce reflections.

Parts Included:



Sunshade



Solid flip-up
lens covers



Manual



LYNX SF

LYNX SF product line

Lynx SF offer entry-level scopes with maximum features and technologies. Models from this series can be fitted on all kinds of air guns, rimfires and rifles. **One-piece main tube** with wired reticle ensure great resistance. All Lynx riflescopes are fitted with **Mil-Dot** reticle, diopter correction, adjustable objective and illumination. All lenses are coated with a special anti-reflective coating to reduce reflections. Models 4-16x50 and 6-24x50 are equipped with **Push-Pull locking turrets** which have metal screw for easy zeroing. Side focus parallax turret with illumination in 11 levels of intensity in red color. **Click system** of each turret are very noticeable and accurate. These models are marked with SF. All models come with a solid flip-up lens covers and mounts for 11 mm dovetail. Lynx provides a quality scopes for a reasonable price.



Shockproof



30mm 1-piece main tube



Waterproof



Anti-reflective coating



Fog proof



Push-pull locking resettable turrets



Wired reticle



Diopter correction



Multi-coated lens



Multi coated green lens



Push-pull zero resettable turrets




Side focus with illumination

Lynx 6-24x50 SF SIR



Technical specifications

Magnification	6-24x
Main tube diameter	30 mm
Lens Coating	Multi coated green lens
Reticle	Wire
Field of view @100 Yards	233-59 in
Exit Pupil	8.3-2.1 mm
Eye Relief	110-100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side Wheel
Parallax Correction	10 yds-infinity
Turret Type	Locking System Turrets
Click Value @100 Yards	1/4 MOA per Click
Illumination	RED
Mounting Length	150 mm [6.1 in]
Overall Length	369 mm [14.5 in]
Weight	793 grams



Mil-Dot

code:
VL5301

Parts Included:



Solid flip-up
lens covers



Mounts



Manual

Push-pull locking turrets are very precise and you will hear each click you will make. If you want to zero your scope, just use the metal screw in the middle of turret. One of the main features is one-piece main tube from high grade aluminum with a diameter of 30 mm. Wired reticle is suitable for sport shooters or passionate hunters.


Diopter correction from -2 to +2 helps to get clear reticle for all shooters. Adjustable front objective parallax from 10 yards to infinity will make your view sharp and crisp. Illumination is placed on left turret with parallax and 11 levels of intensity in red color. Mounts and solid flip-up lens covers are included with scope.

Lynx 4-16x50 SF SIR



Technical specifications

Magnification	4-16x
Main tube diameter	30 mm
Lens Coating	Multi coated green lens
Reticle	Wire
Field of view @100 Yards	295-76in
Exit Pupil	12-3.3 mm
Eye Relief	110-100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Side Wheel
Parallax Correction	10 yds-infinity
Turret Type	Locking System Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RED
Mounting Length	150 mm [5.9 in]
Overall Length	356 mm [14 in]
Weight	764 grams



Mil-Dot

code:
VL5401

Parts Included:



Solid flip-up
lens covers



Mounts



Manual

Push-pull locking turrets are very precise and you will hear each click you will make. If you want to zero your scope, just use the metal screw in the middle of turret. One of the main features is one-piece main tube from high grade aluminum with a diameter of 30 mm. Wired reticle is suitable for sport shooters or passionate hunters.

Diopter correction from -2 to +2 helps to get clear reticle for all shooters. Adjustable front objective parallax from 10 yards to infinity will make your view sharp and crisp. Illumination is placed on left turret with parallax and 11 levels of intensity in red color. Mounts and solid flip-up lens covers are included with scope.

LYNX AO

LYNX AO product line

Lynx is entry-level series intended for all hobby, beginner and pre-intermediate shooters. Models from this series can be fitted on all kinds of air guns, rimfires and rifles. **One-piece main tube** with wired reticle ensure great resistance. All Lynx riflescopes are fitted with **Mil-Dot** reticle, diopter correction, adjustable objective and illumination. All lenses are coated with a special **anti-reflective coating** to reduce reflections. Models 4x32, 6x40 and 3-9x40 are equipped with exposed low-profile turrets with front adjustable objective and **side illumination**. Click system of each turret are very noticeable and accurate. These models are marked with AO. All models come with a **solid flip-up lens covers** and mounts for 11 mm dovetail. Lynx provides a quality scopes for a reasonable price.



Shockproof



Anti-reflective coating



Waterproof



Low profile turrets



Fog proof



Diopter correction



Wired reticle



Multi-coated lens



Multi coated purple lens



Diopter correction




Low profile turret

Lynx 3-9x40 AO SIR



Technical specifications

Magnification	3-9x
Main tube diameter	25.4 mm
Lens Coating	Multi coated purple lens
Reticle	Wire
Field of view @100 Yards	425-125 in
Exit Pupil	12.5-4.4 mm
Eye Relief	104-96 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Objective Adjustment
Parallax Correction	10 yds-infinity
Turret Type	Low Profile Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RED
Mounting Length	125 mm [4.92 in]
Overall Length	320 mm [12.6 in]
Weight	530 grams



Mil-Dot

code:
VL5201

Parts Included:



Solid flip-up
lens covers



Mounts



Manual

One of the main features is one-piece main tube from high grade aluminum with a diameter of 25,4 mm. Wired reticle is suitable for sport shooters or passionate hunters. Magnification 3-9 is one of the most among shooters. Diopter correction from -2 to +2 helps to get clear reticle for all shooters. Adjustable front objective


parallax from 10 yards to infinity will make your view sharp and crisp. Illumination is placed on left turret with 11 levels of intensity in red color. Mounts and solid flip-up lens covers are included with scope.

Lynx 6x40 AO SIR



Technical specifications

Magnification	6x
Main tube diameter	25.4 mm
Lens Coating	Multi coated purple lens
Reticle	Wire
Field of view @100 Yards	263 in
Exit Pupil	6,3 mm
Eye Relief	100 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Objective Adjustment
Parallax Correction	10 yds-infinity
Turret Type	Low Profile Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RED
Mounting Length	125 mm [4.92 in]
Overall Length	320 mm [12.6 in]
Weight	503 grams



Mil-Dot

code:
VL5101

Parts Included:



Solid flip-up
lens covers



Mounts



Manual

One of the main features is one-piece main tube from high grade aluminum with a diameter of 25,4 mm. Wired reticle is suitable for sport shooters or passionate hunters. Fix magnification has even greater resistance so there is no limitation of any caliber or energy. Diopter correction from -2 to +2 helps to get clear reticle for


all shooters. Adjustable front objective parallax from 10 yards to infinity will make your view sharp and crisp. Illumination is placed on left turret with 11 levels of intensity in red color. Mounts and solid flip-up lens covers are included with scope.

Lynx 4x32 AO SIR



Technical specifications

Magnification	4x
Main tube diameter	25.4 mm
Lens Coating	Multi coated purple lens
Reticle	Wire
Field of view @100 Yards	382 in
Exit Pupil	9,5 mm
Eye Relief	101 mm
Diopter Adjustment	-2.0 / +2.0
Parallax Type	Objective Adjustment
Parallax Correction	10 yds-infinity
Turret Type	Low Profile Turrets
Click Value @100 Yards	¼ MOA per Click
Illumination	RED
Mounting Length	125 mm [4.92 in]
Overall Length	356 mm [14 in]
Weight	472 grams



Mil-Dot

code:
VL5001

Parts Included:



Solid flip-up
lens covers



Mounts



Manual

One of the main features is one-piece main tube from high grade aluminum with a diameter of 25,4 mm. Wired reticle is suitable for sport shooters or passionate hunters. Fix magnification has even greater resistance so there is no limitation of any caliber or energy. Diopter correction from -2 to +2 helps to get clear reticle for

all shooters. Adjustable front objective parallax from 10 yards to infinity will make your view sharp and crisp. Illumination is placed on left turret with 11 levels of intensity in red color. Mounts and solid flip-up lens covers are included with scope.

Accessories



Valiant zoom circle



Kill Flash



Valiant transparent lens cover




SWAT wheel



Valiant scope cover





Valiant riflescope bag

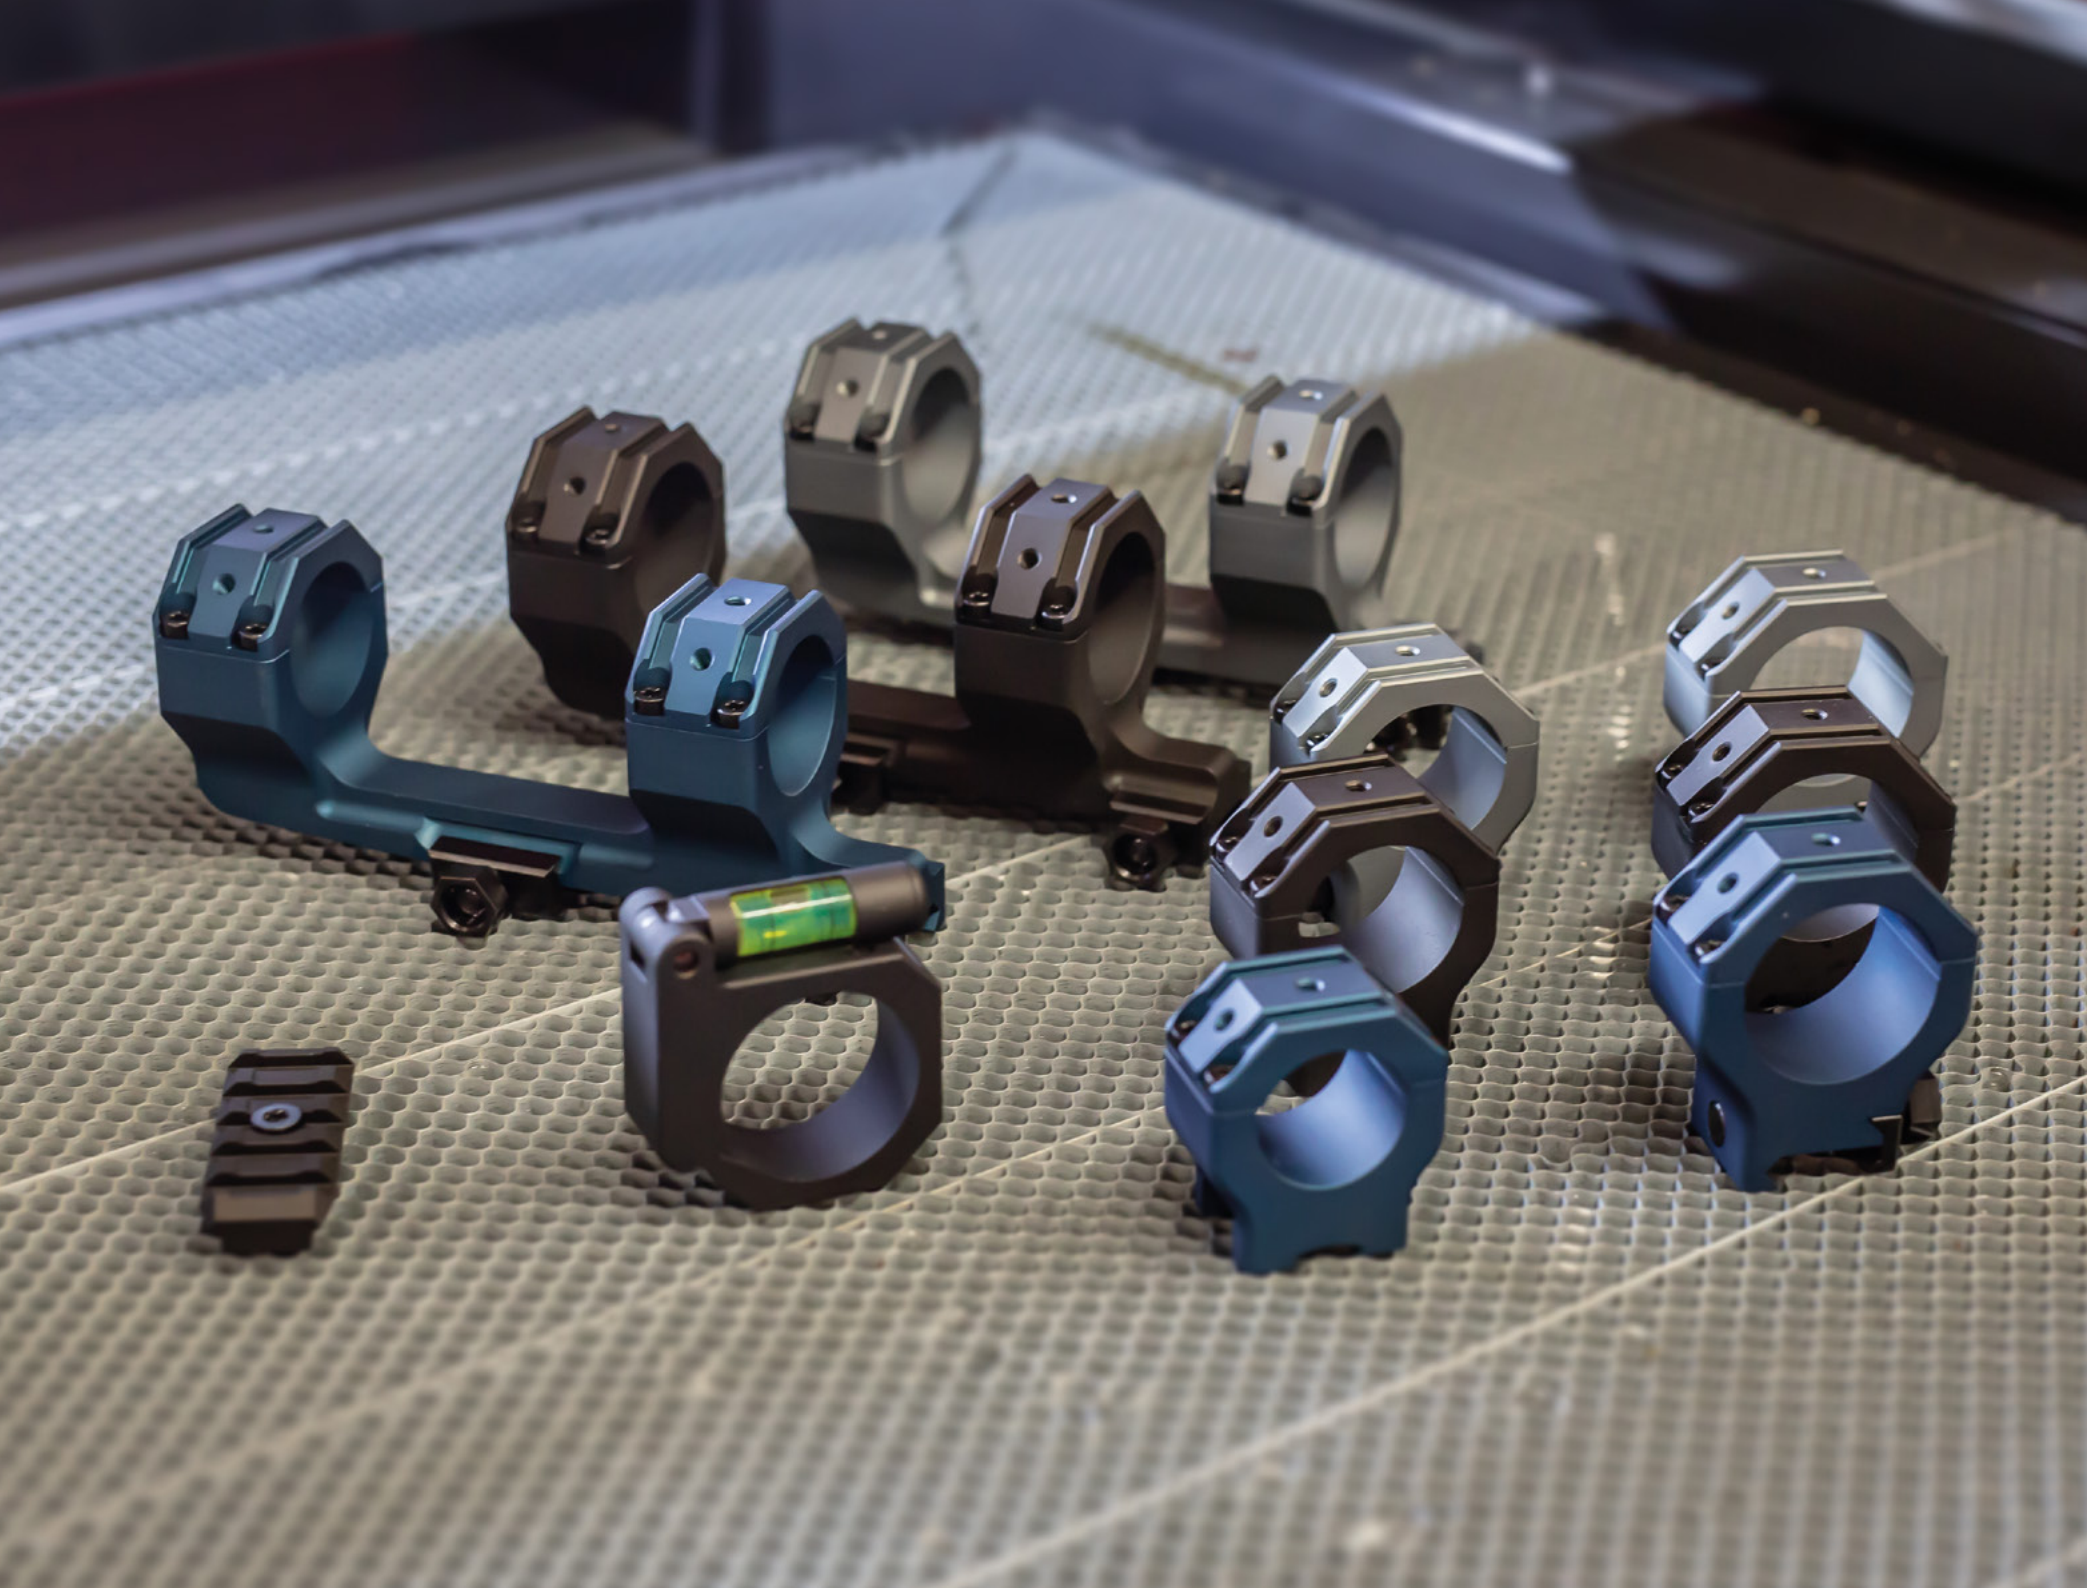

MOUNTS




Mounts

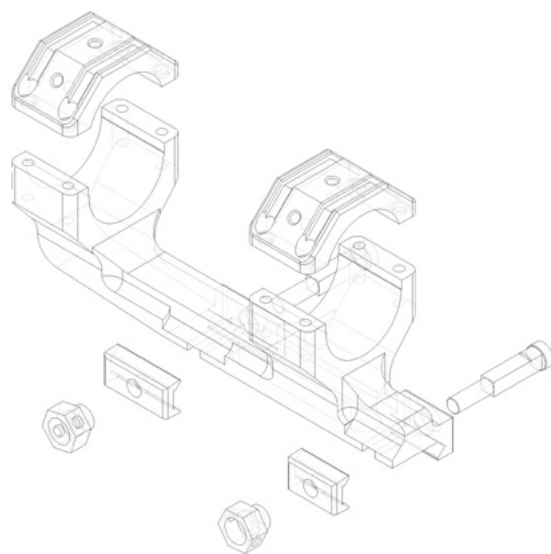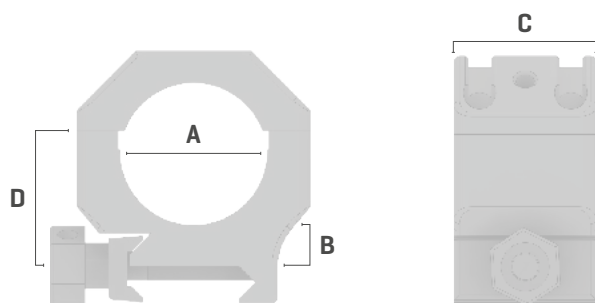


Rail	Ring height	Fits objective Max. size	Dimension A (mm)	Dimension C (mm)	Dimension D (mm)	Weight (grams)	Item code
11mm	Low	45	25,4	25	24	65	VLM0001
11mm	Medium	51	25,4	25	27	71	VLM0002
11mm	High	57	25,4	25	30	78	VLM0003
11mm	Low	49	30	25	26	71	VLM0004
11mm	Medium	55	30	25	29	78	VLM0005
11mm	High	61	30	25	32	85	VLM0006
Weaver	Low	40	25,4	25	20	79	VLM0007
Weaver	Medium	46	25,4	25	23	89	VLM0008
Weaver	High	52	25,4	25	26	87	VLM0009
Weaver	Low	44	30	25	22	80	VLM0010
Weaver	Medium	50	30	25	25	90	VLM0011
Weaver	High	56	30	25	28	96	VLM0012
Weaver	Medium	50	34	25	25	91	VLM0013
Weaver	High	56	34	25	28	97	VLM0014
Cantilever	Medium	76	30	25	38	250	VLM0015
Cantilever	Medium	76	34	25	38	255	VLM0016


Accessories			Dimension A (mm)			Weight (grams)	Item code
Level mount 254			25,4			56	VLM0017
Level mount 300			30			64	VLM0018
Picatinny rail L545						20	VLM0019

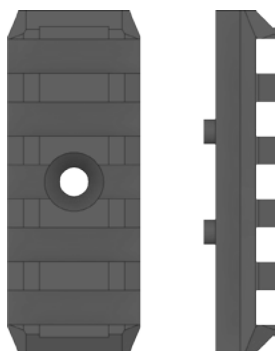


Weaver rail

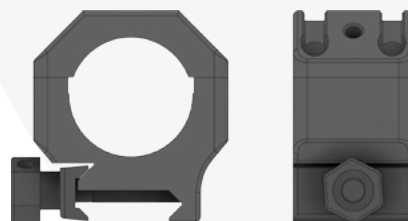



22 mm Weaver

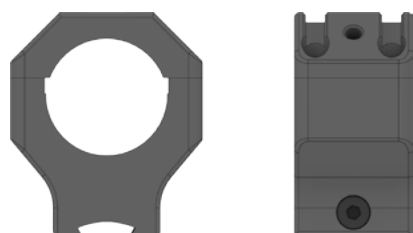

11 mm

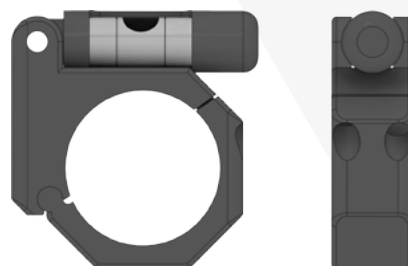

Bubble level set-up

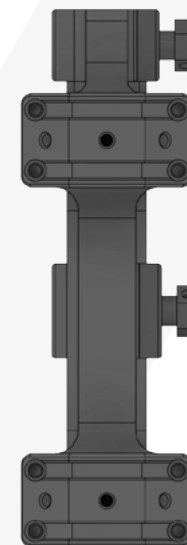


Cantilever

List of riflescopes


Series	Model	Tube	Reticle	Field of view @100 Yards	Exit Pupil	Eye Relief	Diopter Adjustment	Parallax Type	Parallax Correction	Focal Plane	Click Value	Illumination	Overall Length
Zephyr	6-24x50	30 mm	Etched Glass	216 - 54 in	8.3 - 2 mm	103 - 92 mm	-2.0 / +2.0	SF	10 yds - infinity	Second	¼ MOA	RGB	340 mm [13.4 in]
Zephyr	5-20x50	30 mm	Etched Glass	264 - 66 in	10 - 2.5 mm	105 - 95 mm	-2.0 / +2.0	SF	10 yds - infinity	Second	¼ MOA	RGB	340 mm [13.4 in]
Zephyr	4-16x50	30 mm	Etched Glass	326 - 81 in	12 - 3 mm	105 - 95 mm	-2.0 / +2.0	SF	10 yds - infinity	Second	¼ MOA	RGB	340 mm [13.4 in]
Zephyr	10x44	30 mm	Etched Glass	238 in	4.4 mm	100 mm	-2.0 / +2.0	SF	10 yds - infinity	Second	¼ MOA	RGB	340 mm [13.4 in]
Kronos	3-12x56 SF	30 mm	Etched Glass	440.4 - 110.4 in	16.6 - 4.2 mm	110 - 100 mm	-2.0 / +2.0	SF	15 yds - infinity	Second	¼ MOA	RGB	330 mm [13 in]
Kronos	3-12x56	30 mm	Etched Glass	440.4 - 110.4 in	16.6 - 4.2 mm	110 - 100 mm	-2.0 / +2.0	Fixed	100 yds	Second	¼ MOA	RGB	330 mm [13 in]
Kronos	3-12x32	30 mm	Etched Glass	430.5 in - 104.8 in	10.58 - 2.61 mm	85 - 89 mm	-2.0 / +2.0	SF	10 yds - infinity	Second	¼ MOA	No	251 mm [9.88 in]
Kronos	4x40	30 mm	Etched Glass	377.3 in	10 mm	96.5 mm	-2.5 / +2.5	Fixed	100 yds	Second	1/2 MOA	RGB	109 mm [4.3 in]
Kronos	1-5x24	30 mm	Etched Glass	1360.8 - 274 in	8 - 4.7 mm	85 - 89 mm	-2.5 / +2.5	Fixed	100 yds	Second	1/2 MOA	RGB	162 mm [6.4 in]
Themys	4-12x40	25.4 mm	Etched Glass	295 - 98 in	12 - 3.8 mm	110 - 100 mm	-2.0 / +2.0	A0	10 yds - infinity	Second	¼ MOA	No	360 mm [14.2 in]
Themys	3-9x40	25.4 mm	Etched Glass	402 - 125 in	12.5 - 4.4 mm	104 - 96 mm	-2.0 / +2.0	A0	10 yds - infinity	Second	¼ MOA	Red	320 mm [12.6 in]
Lynx	6-24x50	30 mm	Wire	233 - 59 in	8.3 - 2.1 mm	110 - 100 mm	-2.0 / +2.0	SF	10 yds - infinity	Second	¼ MOA	Red	369 mm [14.5 in]
Lynx	4-16x50	30 mm	Wire	295 - 76 in	12 - 3.3 mm	110 - 100 mm	-2.0 / +2.0	SF	10 yds - infinity	Second	¼ MOA	Red	356 mm [14 in]
Lynx	3-9x40	25.4 mm	Wire	425 - 125 in	12.5 - 4.4 mm	104 - 96 mm	-2.0 / +2.0	A0	10 yds - infinity	Second	¼ MOA	Red	320 mm [12.6 in]
Lynx	6x40	25.4 mm	Wire	263 in	6.3 mm	100 mm	-2.0 / +2.0	A0	10 yds - infinity	Second	¼ MOA	Red	320 mm [12.6 in]
Lynx	4x32	25.4 mm	Wire	382 in	9.5 mm	101 mm	-2.0 / +2.0	A0	10 yds - infinity	Second	¼ MOA	Red	320 mm [12.6 in]

RETICLES


List of reticles

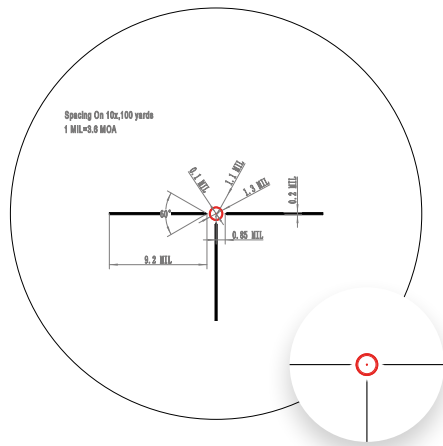


RAQ

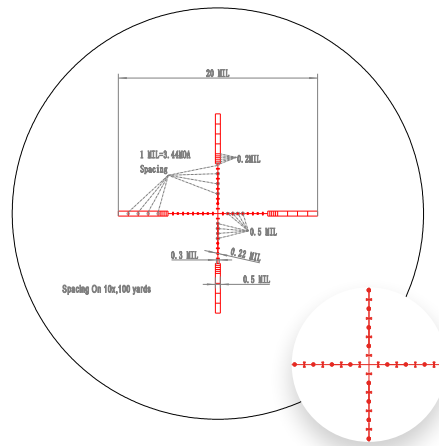


10 1/2
Mil-Dot

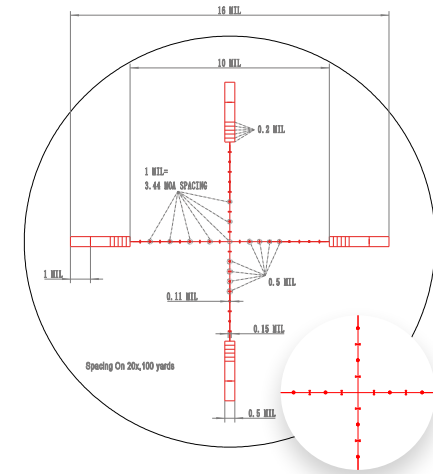


20 1/2
Mil-Dot

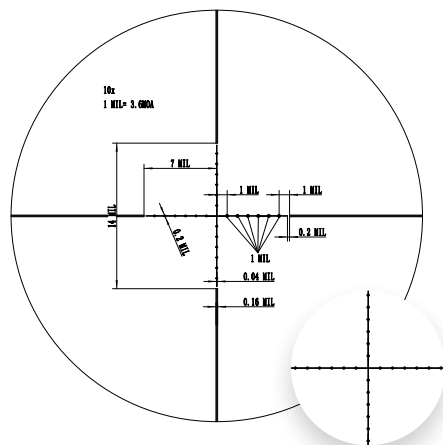

Mil-Dot

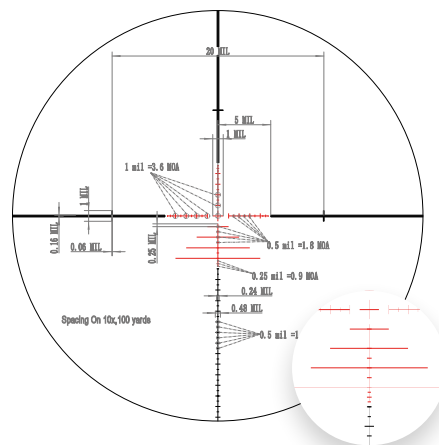

FBR

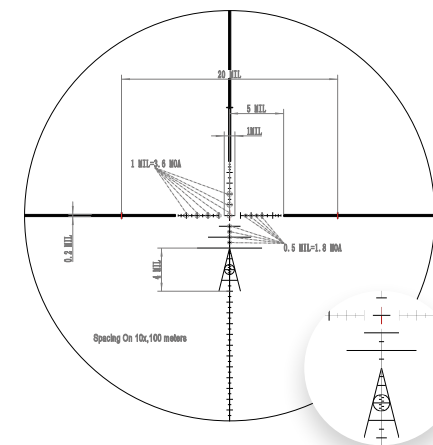

HFT



www.valiant-optics.com

BULLET PROJECT s.r.o.

U Staré elektrárny 291/11, 710 00 Ostrava, Czech Republic

Tel.: +420 774 621 040

E-mail: info@valiant-optics.com