




Einstellung Druckminderventil setting pressure reducing valve

Position Tellerfedern Steyr DMV formation of disc springs at the Steyr regulator		
BAR	Tellerfederpaarung formation of disc springs	Distanzscheiben in mm spacer washers in mm
60	() () () ()	
70	() () () ()	0,2-0,3
85	() () () ()	0,7
120)) () () ()	0,5
140)) () () ()	0,7
<div> <div>Einbaurichtung mounting direction</div>  </div>		

verfügbare Distanzscheiben available spacer washers	
Teilenummer part number	mm
3930002	0,1
3930003	0,3
3930004	0,5

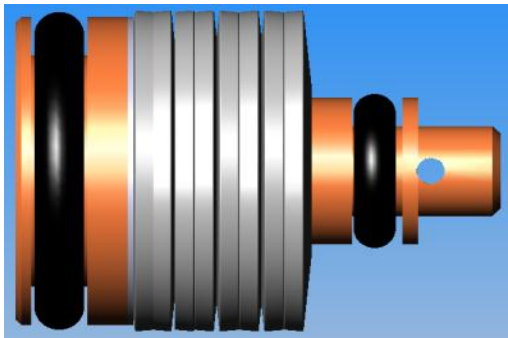

Einstellung Druckminderventil setting pressure reducing valve

Modell/model	Kaliber/calibre	Energie/ energy	Bar DMV/ regulator	Drossel/Dichtscheibe choke/transfer port
Match LP - Air Pistol				
LP 10 / LP 10 C	4,5 mm / .177	7,5	70	
LP 10 E / LP 10 E C	4,5 mm / .177	7,5	70	
LP 50 / LP 50 C	4,5 mm / .177	7,5	70	
LP 2 / LP 2 C	4,5 mm / .177	7,5	70	
LP S	4,5 mm / .177	7,5	60	
Match LG - Air Rifle				
LGB1	4,5 mm / .177	7,5	60	
LG 110 Match/Junior/ Bench Rest/RT	4,5 mm / .177	7,5	70	
Challenge / Challenge E	4,5 mm / .177	7,5	70	
Adventure LG - Air Rifle				
LG 110 FT/HP/HPH	4,5 mm / .177	7,5	85	4101020516 gold
		16	85	
		24	120	
LG 110 HP/HPH	5,0 mm / .20	16	85	
		24	120	
		35	120	
LG 110 HP/HPH	5,5 mm / .22	16	85	
		24	120	
		40	120	
Hunting 5	4,5 mm / .177	7,5	85	4401020020 1,2 mm
		16	85	4401020022 2,2 mm
		24	85	
		28	120	
	5,0 mm / .20	16	85	4401020021 1,8 mm
		24	85	
		35	120	
	5,5 mm / .22	16	85	4401020021 1,8 mm
		24	85	
Hunting 5 Automatic	4,5 mm / .177	40	120	
		7,5	85	4401020024 1,5 mm
		16	85	4401020023 2,4 mm
		24	120	
		28	120	
	5,5 mm / .22	16	85	4401020022 2,2 mm
		24	140	4401020023 2,4 mm
		40	140	